

AIDA

ASI-ES-1000+

A Sleek and Lightweight Bar Code Scanner
for Retail and Commercial Applications

ASI-ES-1000+ supports PDF417,
MicroPDF and GS1 composite code

Capable of reading high density
barcode on contact

Superior reading range up to 10"
on 100% UPC/EAN symbols

Unsurpassed readability on
damaged, poorly-printed, smudged
or low contrast barcodes

Sleek and lightweight design fit
well in most of hands for intuitive
point-and-shoot scanning

Innovative trigger switch and
indication design

Durable construction to withstand
multiple drops to concrete from 1.5
meters

All-in-one host interface design,
including USB HID, USB COM, PS/2
keyboard wedge and RS232

Presentation scanning supported

Optional vibrator for noisy and
quiet environments

Available in black or gray color



The ASI-ES-1000+ series bar code scanner is developed with state-of-the-art FuzzyScan 2.0 Imaging Technology inside, sleek yet lightweight form factor outside. It not only provides superior reading performance, but also delivers easy-to-use ergonomics and modern appearance. The characteristics of reliability, efficiency and outstanding cost-performance make ASI-ES-1000+ well-suited for a broad range of applications and environments, especially for those small to medium sized business. The ASI-ES-1000+ series is the most ideal solution to streamline workflow while boost productivity.

Modern design and durable construction

Designed to meet the need of intensive use all day, the ASI-ES-1000+'s ergonomic handle grip and big trigger button deliver user the maximum comfort but without compromising the sleek-yet-modern form factor. Durable housing ensures that ASI-ES-1000+ can surviving 1.5-meter multiple drops to concrete; thus, providing long lasting reliability and performance.



Superior performance on both contact and distant reading

Thanks to FuzzyScan 2.0 Imaging Technology, the ASI-ES-1000+ series is capable of reading low contrast, damaged, smudged and poorly-printed barcodes labels quickly and accurately. Furthermore, the ASI-ES-1000+ supports most popular linear-stacked barcodes, including PDF417, MicroPDF, Codablock, GS1 Composite code. It can read barcodes from contact up to a distance of 15 inches.



Specifications

Performance Characteristics

Optical System	High performance Linear Imaging Engine
Print Contrast	25% minimum reflective difference
Minimum Resolution	Typical 4 mil (code 39, PCS 0.9)
Working Distance	Up to 10 inches on 100% UPC/EAN symbols Up to 15 inches on 20-mil Code 39
Light Source	630nm visible red LED
Scan Rate	Dynamic scanning rate up to 300 scans per second
Reading Direction	Bi-directional (forward and backward)
Pitch/Skew	± 65° / ± 65°
Operating Modes	Toggle, Trigger, Force, Level, Flash, Diagnostic Alternative, Low power, Presentation
Host Interfaces	PC/AT, PS/2 (DOS V) keyboard wedge PC/AT, PS/2 (DOS V) keyboard direct link TTL RS-232 serial USB HID (USB Keyboard) USB COM port emulation Laser emulation and Wand emulation
Configuration Setup	Bar code command Windows utility - FuzzyScan PowerTool
Data Editing	Condensed DataWizard via bar code command Full-feature DataWizard via FuzzyScan PowerTool
User Interfaces	Blue LED indications Programmable beeper Optional vibrator

Supported Symbologies

1D Linear (F560)	Code 39, Code 39 Full ASCII, Code 32, Code 39 Trioptic Code 128, UCC/EAN-128, Codabar, Code 11, Code 93 Standard & Industrial 2 of 5, Interleaved & Matrix 2 of 5 German Postal Code, China Postal Code, IATA UPC/EAN/JAN, UPC/EAN/JAN with Addendum Telepen, MSI/Plessey & UK/Plessey GS1 DataBar (formerly RSS) Linear, Linear-stacked
Linear-stacked (F568)	PDF417, Micro PDF417, Codablock, Composite

User Environment

Drop Specifications	Withstand multiple 1.5m/5ft. drops to concrete
Environmental Sealing	IP41
Operating Temperature	-10°C to 50°C (14°F to 122°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Humidity	5% to 95% related humidity, non-condensing
Ambient Light Immunity	0 ~ 80,000 lux

Physical Characteristics

Dimension	165.0 mm (L) x 64.7 mm (W) x 38.7 mm (D) 6.50 in. (L) x 2.55 in. (W) x 1.52 in. (D)
Weight	106g
Color	Light Gray or Black
Input Voltage	5VDC ± 10%
Current	Operating : Typical 170 mA @5VDC Standby : Typical 75 mA @5VDC


Safety & Regulatory

EMC	CE, FCC, BSMI, KC, VCCI
Safety ²	LED Eye Safety IEC62471, Exempt Group
Environmental	Compliant with RoHS directive

Accessories

Cables	PS/2 (DOS V) Keyboard Wedge Cable RS232 Serial Cable USB Cable USB Power Steal Cable
Others	Hand-free SmartStand Universal Holder

Accessories

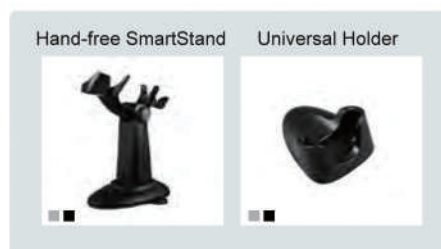

Colors Available : ■ black ■ light gray

Contact Us: If you have further enquiries, please contact us for more information & discussion.