

DENSO

FIXED TYPE 2D CODE SCANNER


QB30 SERIES

Wide-field model QB30-SU
QB30-SR

Standard-range model QB31-SU
QB31-SR



Two models available for a wide range of applications

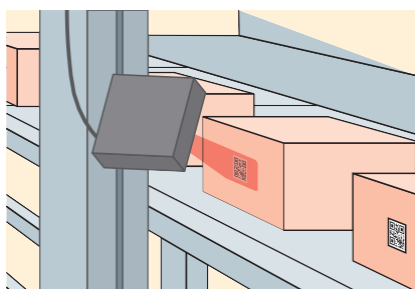

On a plant line



As a kiosk terminal



For an entrance gate terminal

Scanning performance

Two models available, depending on the application

[QB30] Wide-field model with small footprint

With its compact body and wide-angle lens, QB30 can be installed in a small space without needing to be a certain distance from the scanned object. It can reduce installation space when mounted on a kiosk terminal, allowing users to install it anywhere they wish.

* It is recommended to use a low-reflection coating plate in case you wish to install a plate on the scanning side.



[QB31] Standard-range model allows scanning from a distant position

With its deeper scanning field, QB31 can scan objects distant from it. It is perfect for plant production lines, thereby contributing to improved site productivity.



Full functions

Easy setup function adopted

"QB setting," which is a software application enabling users to easily set up scanning conditions and data formats according to the scanned objects, is provided free. It simplifies the troublesome setup process, reducing the user's burden at the time of introduction.

Data collation and edit functions adopted

The scanner features a function for collating registered master data (up to 50 items) with scanned code data, helping to build a system that checks for foreign articles prevents wrong labels from being affixed. Furthermore, since the scanner is compatible with the simplified programming language "ADF Script," data editing, including sorting, extraction and conversion, is possible, reducing the burden involved in development of higher level systems.

Internal environment performance

Safety function which blocks the intrusion of dirt and water drop

Materialized IP54, the protection rating of IEC. Shut out ingress of dust at the production line or rainwater at a semi-outdoor. It can be installed safely.



Operating temperature -20~50°C

It supports operating temperature of -20~50°C and can be installed safely at a semi-outdoor entrance gate.

QB30 series specification

Type	QB30-SR (RS-232C model)		QB30-SU (USB model)		QB31-SR (RS-232C model)		QB31-SU (USB model)	
Scanner unit	Readable code	2D code	QR code, micro QR code, SQRC, iQR, PDF417, micro PDF417, Maxi code, DataMatrix(ECC200), Aztec, GS1 Composite(EAN.UCC Composite)					
		Barcode	EAN-13/-8(JAN-13/-8), UPC-A/-E, UPC/EAN(Add an add-on), Interleaved 2 of 5, CODABAR(NW-7), CODE39, CODE93, CODE128, GS1-128, GS1 DataBar(RSS)					
	Minimum resolution	2D code	0.20mm		0.15mm		0.17mm	
		Barcode						
	Marker light					Visible semiconductor laser (red 1 mW max; JIS Class 2)		
	Scanning reference position	40mm		90mm				
	Scanning range*1	62mm x 39mm		56mm x 30mm				
	Label moving rate*2	800mm/s		—		500mm/s		
	Lighting	White LED				Red LED		
Confirm scan	LED			One (Blue, green, red)				
	Buzzer			3-step volume control, 3-step tone control				
Interface	Interface	RS-232C(Mini D-sub 15-pin female)*3		USB		RS-232C(Mini D-sub 15-pin female)*3		
	Cable length	0.5m		2m		0.5m		
External input/output	Input	Trigger reset		—		Trigger reset		
	Output	Scanning OK/NG, contrast OK/NG Syncsignal of external lighting		—		Scanning OK/NG, contrast OK/NG Syncsignal of external lighting		
Power unit	Rated voltage	5V		5V				
	Power	Supplied from the higher-ranking equipment						
Supplemental functions	Operating button	1 button (Magic key)						
	Batch reading of multiple codes	Maximum 8						
	Image storage	Maximum 10						
Environmental performance	Operating temperature	-20~50°C		-20~50°C				
	Protection rating	IP54		IP54				
	Enclosure color (front)	White		Black				
	Mass	Approximately 120g		Approximately 150g		Approximately 120g		
		Approximately 150g		Approximately 120g		Approximately 150g		

*1: When the RS-232C model is connected to an external device by using the D-sub9PIN, a D15-to-D9S conversion cable and an AC adapter are required.

Product constituents

Main body set

- Operation guide
- User's manual

Option

- RS-232C D15P-to-D9S conversion cable* (CBQ3:RS2000/15-9-01 (2.0 m))
- AC adapter AD2-1005/3000*



* Required when the RS-232C model is connected to an external device by using the D-sub9PIN.

Software

- USB driver
- [Active USB-COM port driver]
- Setup software
- [QB Setting]
- Keyboard emulation software
- [QR_kbif]
- SQRC setup software
- [SQRC Setting]

You can download the items with this mark from our website for free.

Dimensions

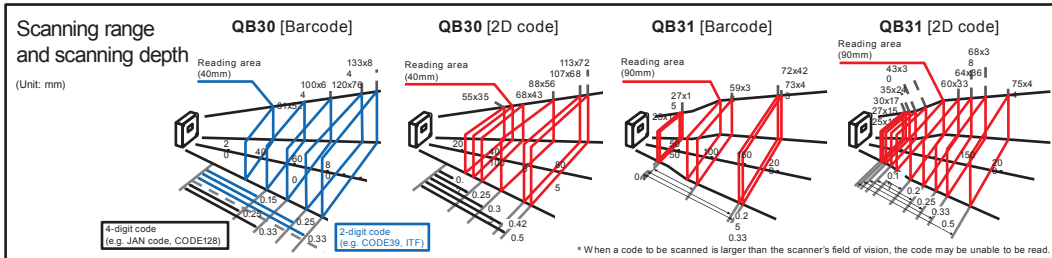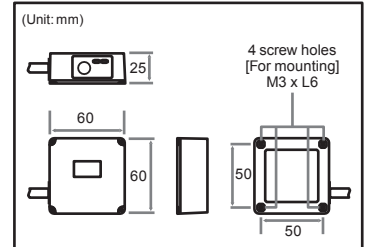

Caution for safe use

- Please carefully read the user's manual before using this product

- External appearance and specification can be changed without notice.
- Contents stated in this catalog is data as of December 2014.

Contact Us: If you have further enquiries, please contact us for more information & discussion.

DENSO WAVE INCORPORATED



Million Tech Development Limited

Address: Unit 509, 5/F, Tower II, Cheung Sha Wan Plaza, 833 Cheung Sha Wan Road, Kowloon, Hong Kong

General Line: (852) 2788 3306

Fax: (852) 2319 2967

Website: <https://milliontech.com>

Sales Enquiry: (852) 2784 2868

Email: sales@milliontech.com

Service Hotline: (852) 2784 2888

Email: helpdesk@milliontech.com