

DENSO

WIRELESS SCANNER

NEW SE1 SERIES



2D code model
SE1-QB




Barcode model
SE1-BB




Data entry to smart devices is now easier, quicker and more accurate!



iOS Android Windows® supported!

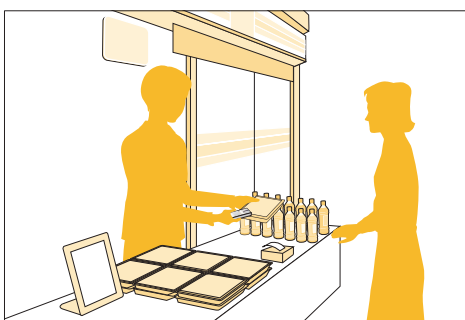

Simplifies POS use at stores

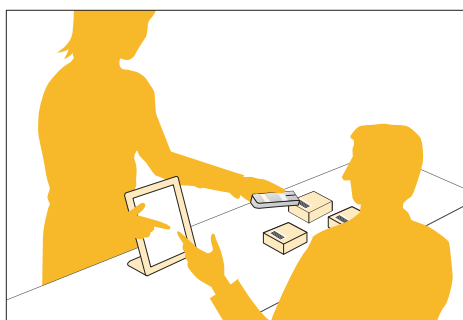

For route salespersons



Helps prevent medical errors in hospitals

Feature 1

Long operation

This scanner can be operated for a long time, reducing operating costs. Even if suddenly out of battery power, there's no need to worry; this scanner is battery-powered.



Feature 2

Supports LCD scanning


Scanning codes displayed on a smartphone or other device is also supported.



Feature 3

Connects to all detected Bluetooth® devices

No complicated settings required. Do settings by just scanning the connection code.

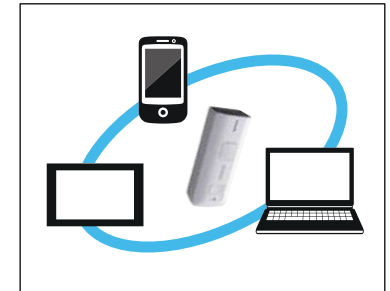

SE1 series specifications

		2D code model		Barcode model	
Type		SE1-QB		SE1-BB	
Scanner		Area sensor		Advanced scan plus (CCD)	
Mode	Readable codes	2D code	QR code,micro QR code,iQR,SQR,PDF417,micro PDF417,DataMatrix(ECC200), Aztec,GS1 Composite(EAN.UCC Composite),Maxi Code	-	
		Barcode	EAN-13/8(JAN-13/8),UPC-A/E,UPC/EAN(with add-on),Interleaved 2 of 5(ITF), CODABAR(NW-7),Standard 2 of 5(STF),CODE39,CODE93,CODE128,GS1-128 (EAN-128), GS1 DataBar (RSS)	EAN-13/8(JAN-13/8),UPC-A/E,UPC/EAN(with add-on),Interleaved 2 of 5(ITF), CODABAR(NW-7),CODE32,CODE39,CODE93,CODE128,GS1-128 (EAN-128), GS1 DataBar (RSS),Standard 2 of 5(STF),MSI,Plessey	
Minimum resolution		2D code	0.167 mm	-	
		Barcode	0.125 mm		
PCS value		0.3 min.			
Angle		±50°			
Scanning confirmation		Confirmation LED (blue, red), Buzzer			
Communication interface	Method	Bluetooth ver. 2.1 + EDR-based class 2			
	Profile	SPP, HID			
Power	Power	Alkaline AA battery x 2 or AA Eneloop® battery x 2			
	Operating time *1	50 hours		100 hours	
Environment requirements	Security level	IPX2			
	Drop impact resistance *2	1.2 m high over a concrete floor with 6 times			
	Operating temperature	-5~50°C			
Weight		Approx. 60 g (not including batteries)			

*1: With one reading pass over a 5 s period.

*2: These are test values, but not guaranteed values.

Product configuration

Accessories

- Scanner
 - Operation Guide (with code menu for settings)
- * Batteries are not included.

Software

- Setting software (Scan Tune App)
- Software application to prepare parameter setting codes for SE1 series on PC.
* Downloadable via QBdirect.


Option (sold separately)

- Neck strap (NSBHT-500)
- Hand strap (HSSE1)



Silicone cover

- Silicone cover common to SE1-BB and -QB (Clear)
- Silicone cover common to SE1-BB and -QB (Black)

Dimensions



Scanning performance

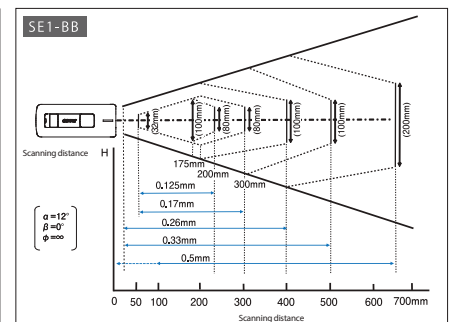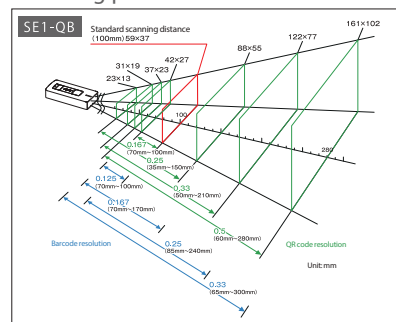

To use this product safely

- Before using this product, please read its User's Manual thoroughly for correct use.

Contact Us: If you have further enquiries, please contact us for more information & discussion.

Million Tech Development Limited

Address: Unit 509, 5/F, Tower II, Cheung Sha Wan Plaza, 833 Cheung Sha Wan Road, Kowloon, Hong Kong

General Line: (852) 2788 3306

Sales Enquiry: (852) 2784 2868

Service Hotline: (852) 2784 2888

F a x : (852) 2319 2967

E m a i l : sales@milliontech.com

E m a i l : helpdesk@milliontech.com

Website: <https://milliontech.com>