



CS469 4-Port RFID Reader



CS469 4-Port Reader is an Ethernet POE connected UHF EPC C1 G2 RFID reader with long read range (12 meters with Dogbone tags from Smartrac) and high read rate (300 tags per second). **The high performance level, combined with affordable price, makes the CS469 the best total cost solution in the industry.** With the same API as CS203 and CS468 - CSL Unified API, the application development time and cost are reduced, resulting in a faster time to market.

Applications

- | | | |
|------------------|----------------------------|--------------------|
| Retail jewelry | Production line management | Library management |
| Asset management | Personnel tracking | Pharmaceuticals |
| Logistics | Cold chain management | Uniform tracking |
| Quality control | Patient monitoring | Sports timing |


Product Features

- 4-ports for connecting up to **4 antennas**.
- Long read range of 12 meters** depending on tag.
- High read rate** 300 tags/second.
- Dense Reader Mode (DRM) available.**
- Ethernet connectivity**, with PoE (PoE+ or IEEE802.3at recommended).
- CSL Unified API** - Same API as that of CS203, CS468 and CS101 readers.
- Best Price/Performance Ratio**

Dimensions	Length: 272 mm (10.71 in); Width 153 mm (6.03 in); Height: 25 mm (0.99 in)
Weight	0.7 Kg
Read Range	CS469-2 with CS771S-2 antenna (FCC version): 12 meters with DogBone tags from Smartrac
Read Rate	300 tags /second
Protocol	ISO18000-6C, EPC UHF Class 1 Gen 2, Dense Reader Mode available (Class 3 Gen 2 compliant)
Frequency Range	One of the following: 865-868 MHz, 865-867 MHz, 902-928 MHz, 922-928 MHz, 920-925 MHz, 915-922MHz
Output Power	30 dBm at RF connector
RF Connectors	Reverse Polarity SMA Jack
External Control	2 x GPO and 2 x GPI
Environment	Operating Temperature: -20°C to 50°C (-4°F to 122°F) Storage Temperature: -40°C to 85°C (-40°F to 185°F) Humidity: 95% Non-condensing
Usage	Indoor use only, NEMA enclosure box is required for protection in outdoor environment
Connectivity	Ethernet, USB, Serial (RS232)
Power Supply	DC supply (12 V, 2.5 A), or use PoE (PoE+ or IEEE802.3at required)

Order Code CS469-**N**
 N=1: 865-868 MHz (Europe) & 865-867 MHz (India), N=2: 902-928 MHz (USA), N=4: 922-928 MHz (Taiwan),
 N=7: 920-925 MHz (China, Australia, Malaysia, Hong Kong etc.), N=8: 915-922 MHz (Japan)

Contact Us: If you have further enquiries, please contact us for more information & discussion.

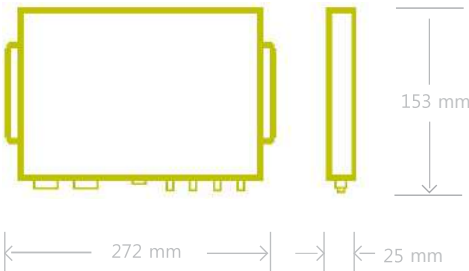

Million Tech Development Limited



Address: Unit 509, 5/F, Tower II, Cheung Sha Wan Plaza, 833 Cheung Sha Wan Road, Kowloon, Hong Kong
 General Line: (852) 2788 3306 Fax: (852) 2319 2967 Website: <https://milliontech.com>
 Sales Enquiry: (852) 2784 2868 Email: sales@milliontech.com
 Service Hotline: (852) 2784 2888 Email: helpdesk@milliontech.com