

# SLP-T400

4 inch Thermal Transfer  
Desktop Label Printer



Retail



Healthcare  
&  
Pharmacy



Post &  
Parcel



Warehouse &  
Storage  
Handling

## Durable and Specialized



### Advanced Form Factor

- Paper feeding speed up to 6 ips (152 mm/sec)
- Thermal Transfer, Direct Thermal supported
- Wide range of ribbon rolls length from 74m to 300m
- Triple interface on board standard
- Optional RFID model (SLP-T400R)

### Enhanced Firmware

- Multiple programming languages recognizable :  
SLCS, BPL-Z™, BPL-E™
- The label format can be stored in the printer and can be reused 2D Barcode printing
- 23 Code pages supported



# SLP-T400


## 4 inch Thermal Transfer Desktop Label Printer



### Features

#### All-in-one interface

- Standard:  
USB + Serial + Parallel
- Optional:  
USB + Serial + Ethernet

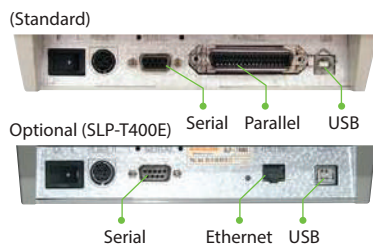

#### User-friendly design

- Wide range of ribbon capacity
- Easy paper loading with adjustable paper guide
- Pause and cancel function-keys

Ribbon range of ribbon capacity



#### Multiple programming languages recognizable

The SLP-T400 is compatible with market-leading programming language;  
SLCS, BPL-Z™, BPL-E™.



#### Label Artist™

Bixolon provides its custom label design program as bundle. It supports database connection as well as text, drawing lines and boxes, all kinds of graphics and 1D/2D Barcode printing.

### Specifications

#### Print Characteristics

**Printing Method:** Thermal Transfer, Direct Thermal  
**Printing Speed:** SLP-T400: Up to 6 ips (152 mm/sec)  
SLP-T403: Up to 4 ips (100 mm/sec)  
**Print Resolution:** SLP-T400: 203 dpi / SLP-T403: 300 dpi  
**Printing Width:** SLP-T400: Up to 104 mm / SLP-T403: Up to 105.7 mm  
**Printing Length:** 6 ~ 1000mm  
**Sensor:** Transmissive, Reflective (adjustable), Ribbon-End, Head open

#### Media Characteristics

**Media Type:** Gap, Black Mark, Notch, Continuous, Fan-Fold  
**Media Width:** 15 ~ 116 mm  
**Media Roll Diameter:** Up to 130 mm  
**Media Thickness:** 0.06 ~ 0.20 mm  
**Supply Method:** Easy Paper Loading

#### Ribbon Characteristics

**Ribbon Type:** Wax, Wax / Resin, Resin, Outside  
**Ribbon Width:** 33 ~ 110 mm  
**Ribbon Length:** Up to 300 m  
**Core Inner Diameter:** 25.4 mm, 12.5 mm

#### Physical Characteristics

**Dimensions (W x L x H):** 214 x 310 x 200 mm (8.42 x 12.20 x 7.87 inch)  
**Weight:** 2.75 kg (6.06 lbs.)  
**Power:** EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz

#### Performance Characteristics

**Memory:** 8MB SDRAM, 2MB FlashROM  
**Interface:** Triple Interface  
**Standard:** USB + Serial + Parallel  
**Optional:** USB + Serial + Ethernet

#### Environment Characteristics

**Temperature:** Operating: 5 ~ 40 °C (41 ~ 104 °F)  
Storage: -20 ~ 60 °C (-4 ~ 140 °F)  
**Humidity:** Operating: 10 ~ 80% RH / Storage: 10 ~ 90% RH

#### Software

**Emulation:** SLCS, BPL-Z™, BPL-E™  
**Driver / Utility:** Windows Driver, Linux CUPS Driver, Mac Driver, Virtual COM USB/Ethernet Driver, Utility Program, Label Artist™  
**SDK:** Android SDK, Windows SDK

#### Fonts / Graphics / Symbologies

**Fonts:** • 10 SLCS ResidentBitmap Fonts  
• One SLCS ResidentScalableFont  
• 23 Code Page

**Graphics:** Supporting user-defined fonts, graphics, formats, and logos

#### Barcode Symbologies

1D: Coda Bar, Code 39, Code 93, Code 128, EAN-8, EAN-13, IMB, Interleaved 2-of-5, ITF, UCC/EAN-128, UPC-A, UPC-E  
2D: Data Matrix, MaxiCode, PDF417, QR code (select two only)

#### Options

Ethernet, RFID (Frequency: 885 ~ 955 MHz, Transmit Power: 1W, Modulation: ASK, Air Protocol: GEN2, Type: FHSS), Peeler, Auto Cutter, External Paper Supply

